
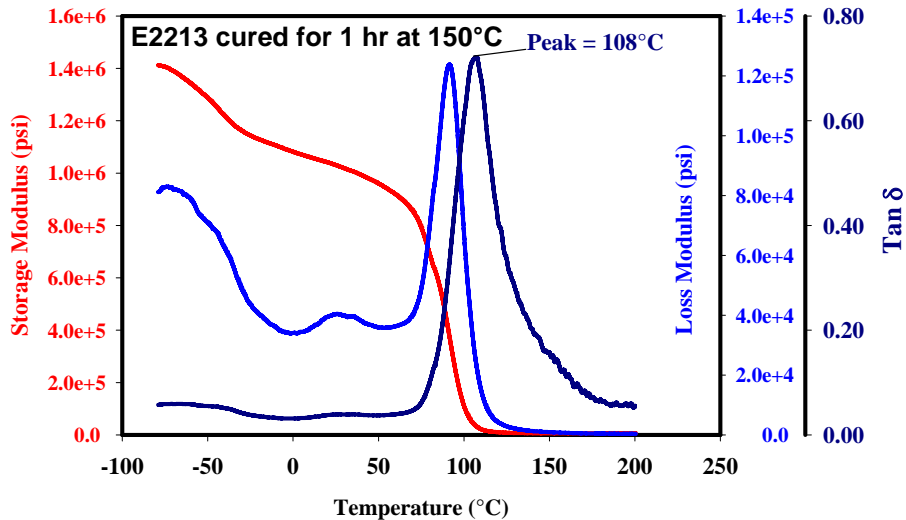


<u>Property</u>	<u>Method</u>	<u>Value Obtained</u>
Specific Heat Capacity, J/g-°K	ASTM E1461	0.46
Thermal Conductivity, W/M-°K	ASTM E1461	1.3
Space Simulated Outgassing, Total Mass Loss (TML), %	ASTM E595	0.293
Space Simulated Outgassing, Collected Volatiles (CVCN), %	ASTM E595	0.026
Space Simulated Outgassing, Water Vapor Recovered (WVR), %	ASTM E595	0.072

DMA Scans

Scan at 4°C per minute, modulus in flexure (3 point bend) at a frequency of 1 hertz.

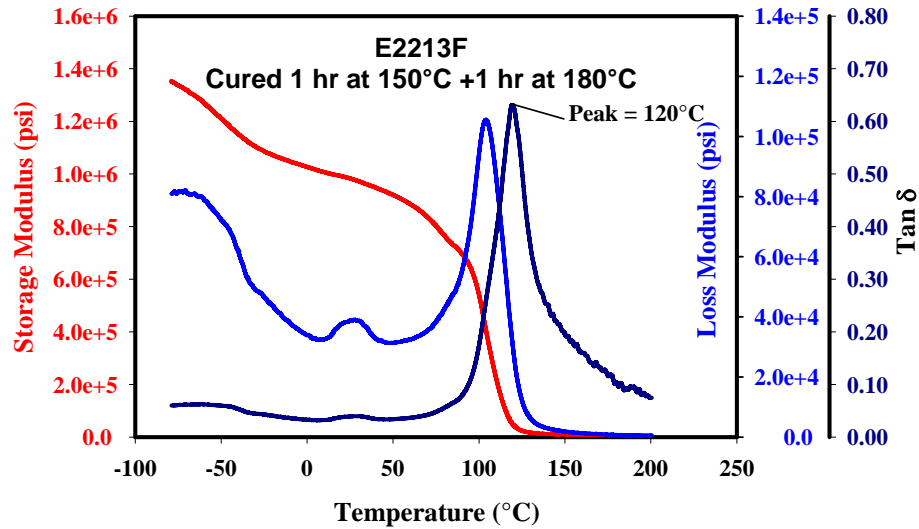

Rev. 070507-PLC